




## Photo

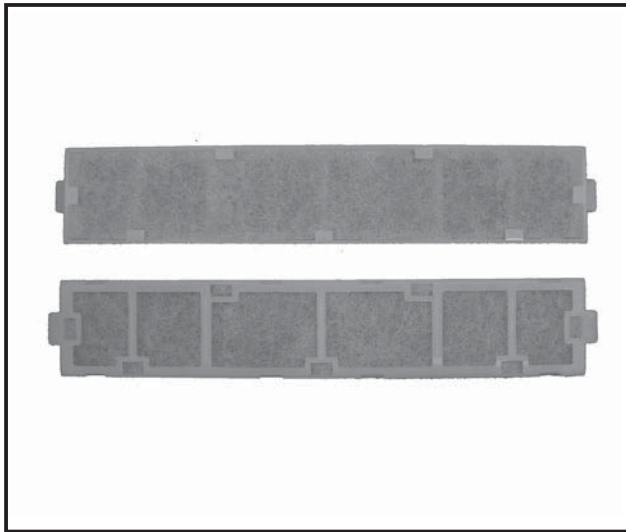

## Descriptions

This air cleaning filter catches dead mites and their droppings, pollen and other allergens on the filter filament, then decomposes them with artificial enzymes.

(Artificial enzyme catalyst on the filament catches the allergens and helps the chemical reaction with oxygen and severs the S-S\* bonds. \*S= Sulfur atoms)

## Applicable Models


- MSZ-AP25VG
- MSZ-AP35VG
- MSZ-AP42VG
- MSZ-AP50VG
- MSZ-EF18VGV
- MSZ-EF18VGB
- MSZ-EF18VGS
- MSZ-EF22VGV
- MSZ-EF22VGB
- MSZ-EF22VGS
- MSZ-EF25VGV
- MSZ-EF25VGB
- MSZ-EF25VGS
- MSZ-EF35VGV
- MSZ-EF35VGB
- MSZ-EF35VGS
- MSZ-EF42VGV
- MSZ-EF42VGB
- MSZ-EF42VGS
- MSZ-EF50VGV
- MSZ-EF50VGB
- MSZ-EF50VGS
- MSZ-SF25VE3
- MSZ-SF35VE3
- MSZ-SF42VE3
- MSZ-SF50VE3
- MSZ-WN25VA
- MSZ-WN35VA
- MSZ-DM25VA
- MSZ-DM35VA
- MSZ-HJ25VA
- MSZ-HJ35VA
- MSZ-HJ50VA
- MSZ-HJ60VA
- MSZ-HJ71VA
- MSZ-HR25VF
- MSZ-HR35VF
- MSZ-HR42VF
- MSZ-HR50VF
- MSY-TP35VF
- MSY-TP50VF
- MFZ-KJ25VE2
- MFZ-KJ35VE2
- MFZ-KJ50VE2
- MLZ-KP25VF
- MLZ-KP35VF
- MLZ-KP50VF

## Specifications

Material	Filter: Polyester, rayon, actylic resin Frame: Polypropylen
Color (Filter)	Blue


## Dimensions

Unit : mm

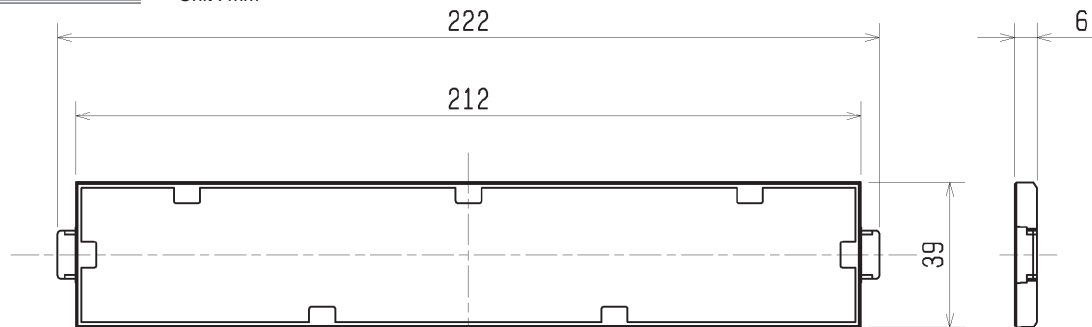

## How to Use / How to Install

### Replacement of the air cleaning filter <MSZ Type>



1. Lift the front panel until a "click" is heard.
2. (1) Remove the air filter.  
(2) Remove the air cleaning filter.  
(3) Install a new air cleaning filter.  
(4) Install the air filter.
3. Close the front panel securely and press the positions indicated by the arrows.



Every 3 months:


- Remove dirt by a vacuum cleaner.

When dirt cannot be removed by vacuum cleaning:

- Soak the filter and its frame in lukewarm water before rinsing it.
- After washing, dry it well in shade. Install all tabs of the air filter.

Every year:

- Replace it with a new air cleaning filter for best performance.




Pull to remove from the air filter

OPTIONAL PARTS

## Replacement of the air cleaning filter <MFZ Type>


### (1) Remove the front panel.

1. Push down the tab on the both sides of the unit to open the front panel.
2. Pull the front panel toward you to remove it.
3. Open the front panel completely and remove it.



### (3) Replace the air cleaning filter.

Fix the filter with the tabs securely.

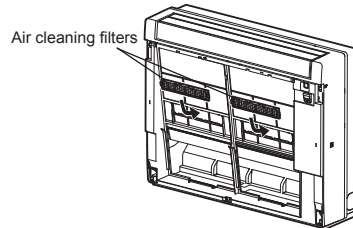

Every 3 months:

- Remove dirt by a vacuum cleaner.


When dirt cannot be removed by vacuum cleaning:

- Soak the filter and its frame in lukewarm water before rinsing it.
- After washing, dry it well in shade. Install all tabs of the air filter.


Every year:

- Replace it with a new air cleaning filter for best performance.

### (2) Remove the air filter.



### (4) Install the air filter.




### (5) Securely close the front panel.


Install the front panel by the removal procedure in reverse. Refer to (1) 1-3.

## Replacement of the air cleaning filter <MLZ Type>


### 1. Press the tabs on the intake grille.

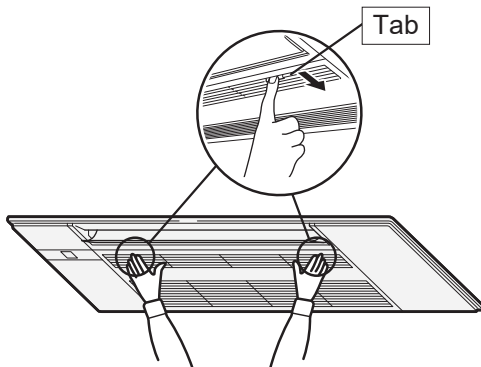

### 2. Open the intake grille while holding it.

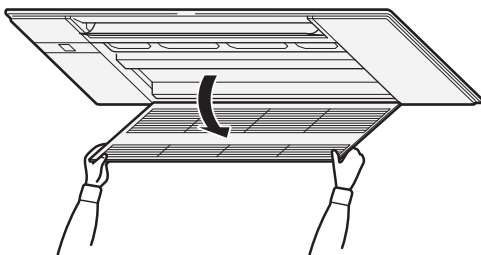

### 3. Remove the air cleaning filter.

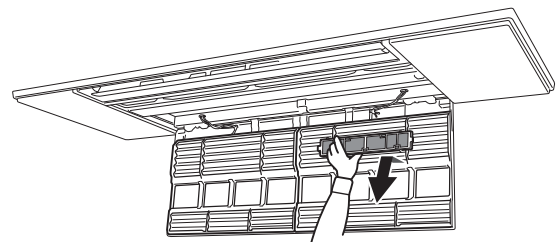

### 5. Close the intake grille.

- Make sure that the safety strings do not hang out of the intake grille.

### 6. Press around the each tab of the intake grille until a "click" is heard and press the center.

